





Must operate lamp between 10.8 -12.0 volts. Optimal range is 11.5. Check voltage with digital multi-meter.

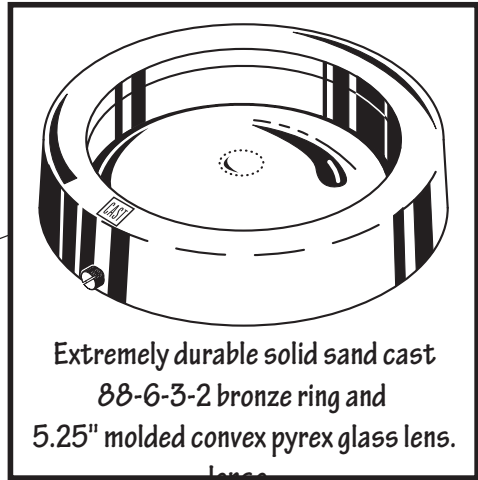

Extremely durable solid sand cast 88-6-3-2 bronze ring and 5.25" molded convex pyrex glass lens.

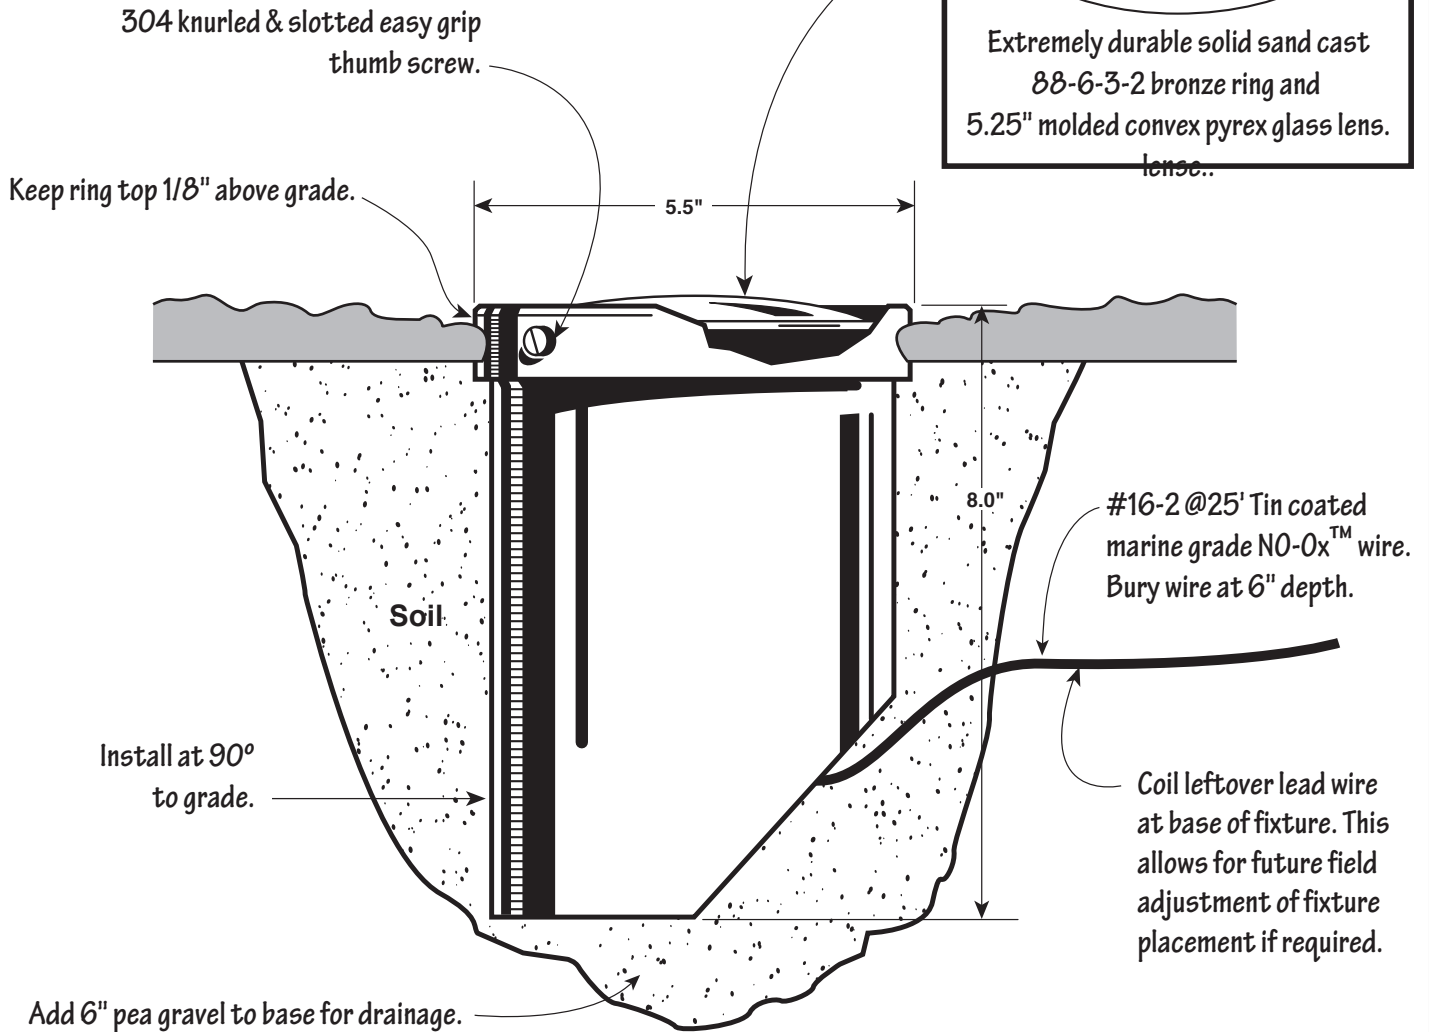

Drawing not to scale

PAR 36 Well Light w/CWLR1CB Bronze & Glass Cover Typical Installation Detail

**MODEL #
CWLWFLEAD**

Rev. 2-28-03

Plan Symbol:

- NOTES:
- Max Lamp Rating 50 watt.
 - Provided with PAR 36, 35 watt wfl halogen lamp.
 - Do not install in low lying areas where water can collect in fixture.
 - Always refer to product instruction sheet prior to installation.