


## CAST LED Engineered Wall Light Product Information (CEWL5LED1)


**The CAST LED Engineered Wall Light – Compact, Rugged, Versatile, & Energy Efficient**  
**“The Industry’s only Luminaire that Lasts Longer than its LED Light Source!”**




Rock-solid construction with a water-resistant 50,000-hr LED light source.

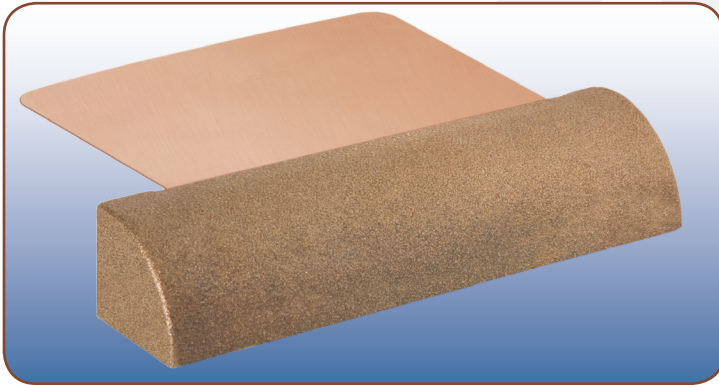

Installs quickly and securely in a variety of hardscape and architectural applications.

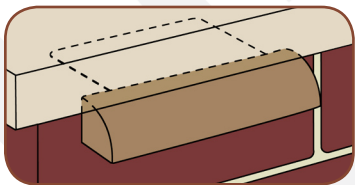

Typical mounting application under capstone.

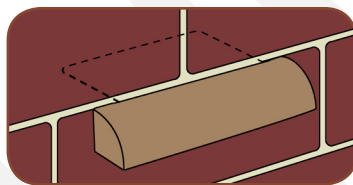

Typical mounting application between blocks.

### Construction:

Solid bronze body, copper bracket, frosted soda lime lens, stainless steel thumbscrews, high temperature socket, 25' tin-coated #18-2 No-Ox® marine-grade wire.

### Specifications:

Integrated replaceable LED light source (50,000 hr. life). Power consumption – 3W (light output greater than 18W incandescent version of this fixture). Color Temperature: 2700° K; CRI: 85. Accepts input from 8V to 18V (AC or DC). Water resistant.

### Warranty:

Lifetime on fixture components; 5-Year on LED board and driver.

### Description:

Attractive LED wall light constructed of solid bronze with a flat copper bracket for easy flush mounting under capstones, between courses of block and under railings.

### Features:

- ▶ Solid bronze construction, highly corrosion resistant, naturally weathers to a beautiful patina.
- ▶ Solid copper bracket for quick installation in a variety of locations. Bracket is thin so it does not interfere with retaining wall construction.
- ▶ Bracket extends from back of fixture so it can be hidden from view, allowing seamless flush-mounting (even between blocks) with no visible hardware.
- ▶ To enable optimal adjustment of beam direction, bracket can be bent or installed extended from wall (extended portion of bracket will patina to the same color as fixture body).
- ▶ Enclosed LED housing includes internal reflector and frosted glass lens for wide even light distribution (no hot spots) and protection from sprinklers and rain.
- ▶ Replaceable LED board.
- ▶ Pre-wired with 25' tin-coated No-Ox® marine grade wire.
- ▶ 50,000 hr. LED life with minimal lumen degradation. Accepts 8V to 18V input.

### Uses:

Suitable for applications where a wall-mounted or railing-mounted fixture is required. Ideal for retaining walls, stairwells and railings.

### Dimensions:

