




**CAST MR-11 BULLET LIGHT – CBL5CB**

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

Drawing not to scale

Optimal voltage is 10.8 to 11.3 volts. Check voltage with digital multi-meter.

Extremely durable solid sand-cast bronze body and copper shroud.

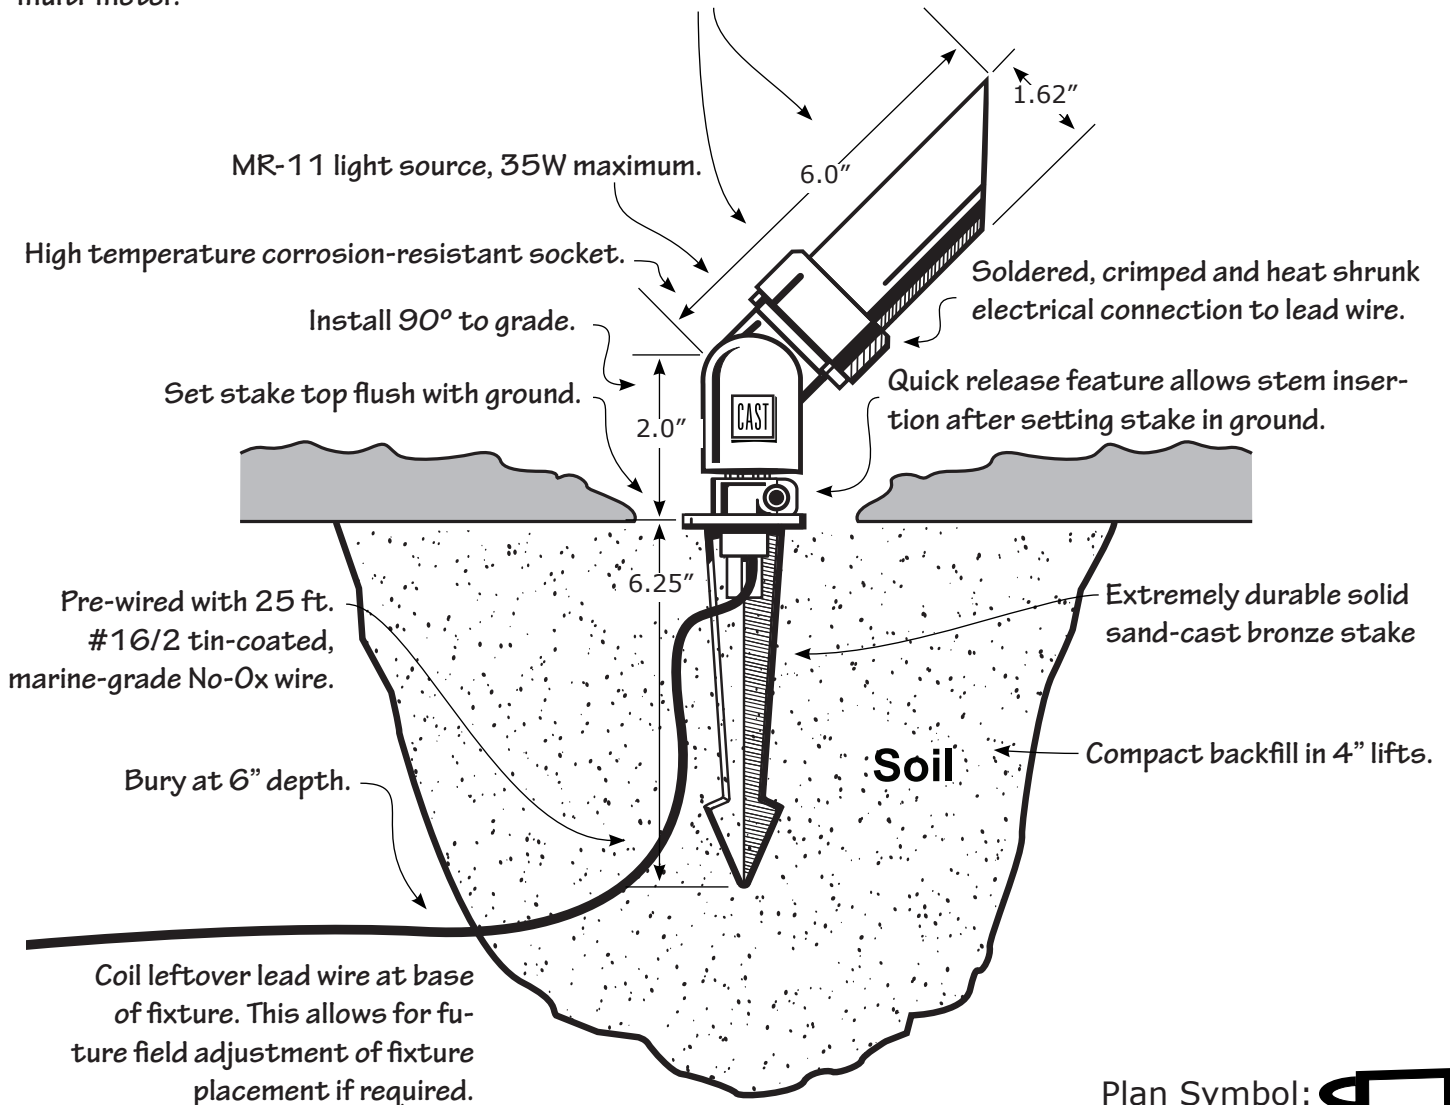

Plan Symbol:

**Notes**

- Requires MR-11 (not included)
- Max. lamp rating 35 watts
- Use only covered MR-11 lamps
- Orient upwards unless protected from rain
- Refer to product installation sheet prior to installation

**MOUNTING OPTIONS**

- ✳ Small Mounting Stake (CMS5CB) (incl)
- ☐ MR-11 Mounting Canopy (XCBPTMC2)

**LENS OPTIONS**

- ☐ Optical Spread Lens (COSL11)
- ☐ Optical Linear Spread Lens (COLL11)
- ☐ Optical Frosted Lens (COFL11)
- ☐ Hexcell Louver (CXL2)