




**CAST MR-16 WELL LIGHT w/GRATE – CWLMR16G**

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3. Check voltage with digital multi-meter.

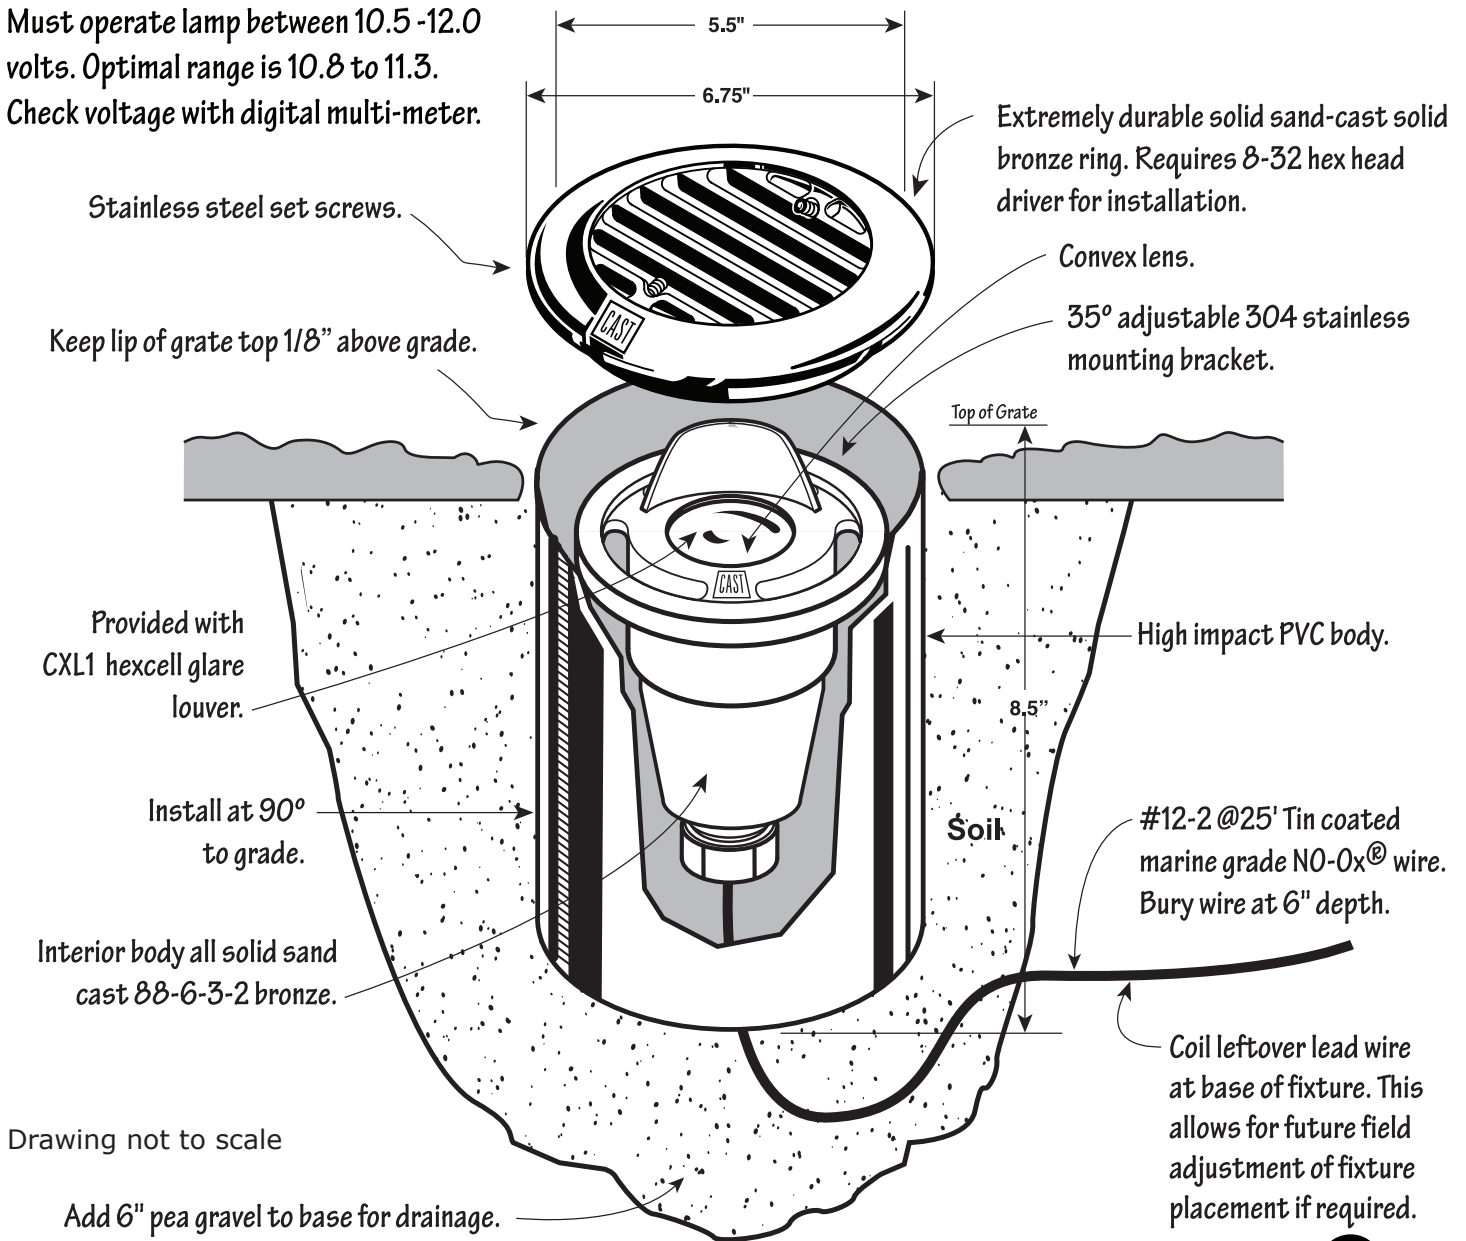

Plan Symbol:

**Notes**

- Requires MR-16 (not incl.)(max. rating 50W)
- Use only covered MR-16 lamps
- Do not install in low-lying areas where water can collect in fixture
- Refer to product installation sheet prior to installation

**COVER OPTIONS**

- Lens and Bronze Ring (CWLR1CB)
- Bronze Grate (CWLG1CB) (incl.)
- Lens for Bronze Grate (CWLGLENS)

**LENS OPTIONS**

- Optical Spread Lens (COSL)
- Optical Linear Spread Lens (COLL)
- Optical Frosted Lens (COFL)
- Hexcell Louver (CXL1) (incl.)