



**CAST NICHE LIGHT – CNL1CB**

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

Drawing not to scale

Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3. Check voltage with digital multi-meter.

Screw holes. Use stainless mounting hardware suitable for the application.


All 88-6-3-2 solid bronze base.

Watertight strain relief.

Single contact bayonet base socket

Solid copper body.

180° Fully adjustable swivel.

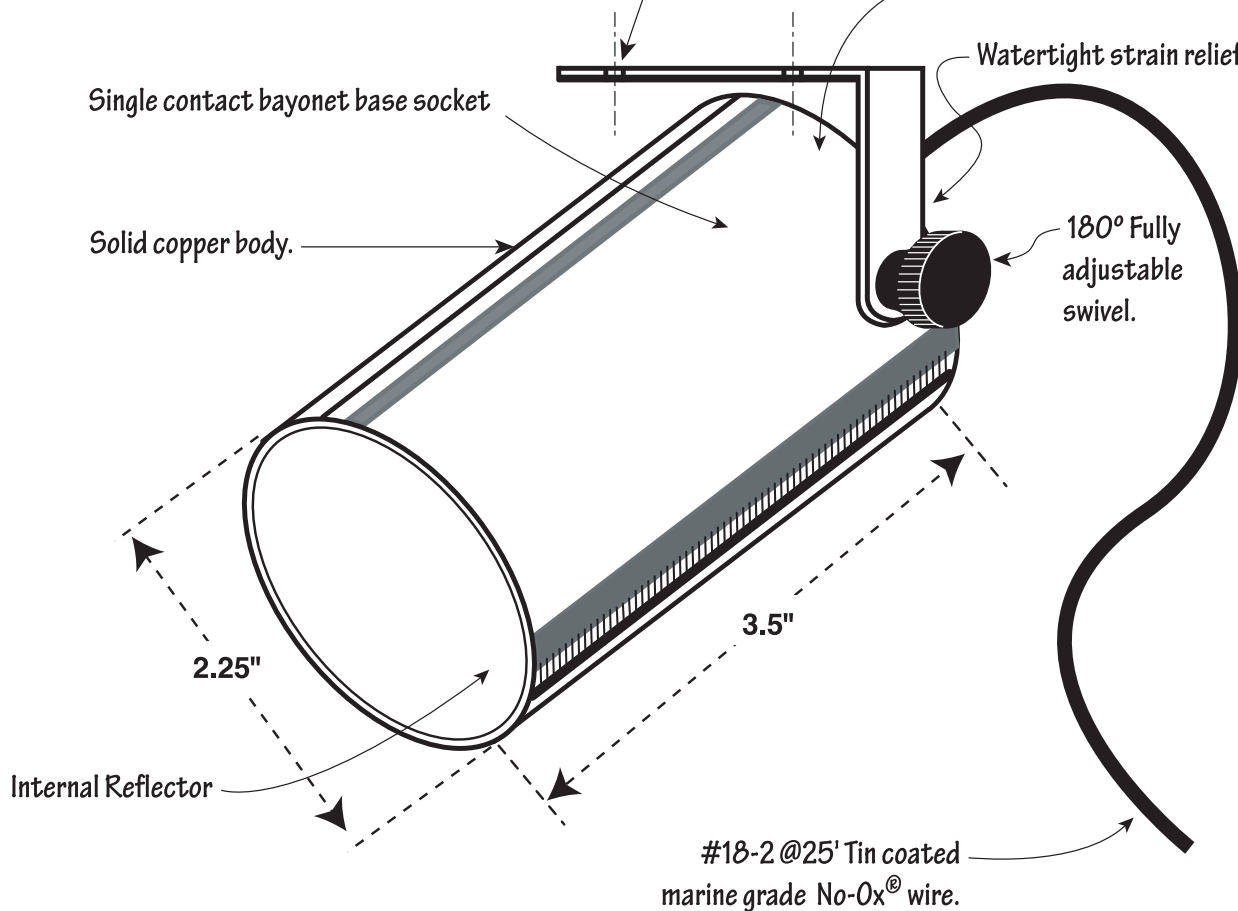

**Notes**

Plan Symbol:

- Requires Bayonet-Mount Single-Contact Lamp (included-20W; max. rating-35W)
- Downward orientation only
- Refer to product installation sheet prior to installation