



CAST SAVANNAH AREA/PATH LIGHT – CSA1CB

Project: _____ Date: _____
 Fixture Type: _____ Quantity: _____
 Specifier: _____

Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3. Check voltage with digital multi-meter.

Extremely durable solid sand cast 88-6-3-2 bronze body.

Soldered, crimped and heat-shrunk electrical connection to lead wire.

220°C high-temp teflon-jacketed tin-coated wedge base composite socket.

Glass wedge base 25 watt krypton lamp light source.


Heavy duty 100% solid copper fixture stem — .115 wall thickness.

Keep stake top flush w/grade.

Install at 90° to grade.

#16-2 @35' Tin coated marine grade No-Ox® wire. Bury wire at 6" depth.

Coil leftover lead wire at base of fixture. This allows for future field adjustment of fixture placement if required.

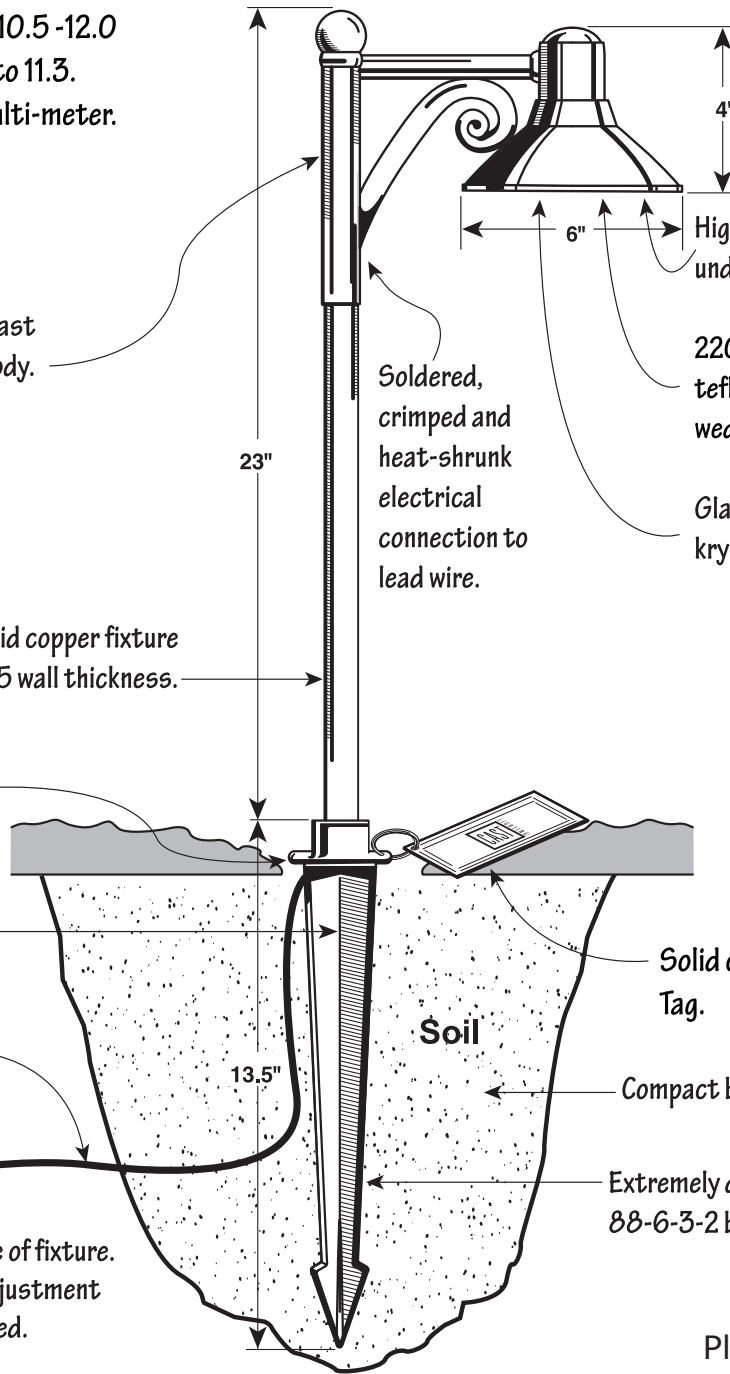

Solid copper Fixture Record Tag.

Compact backfill in 4" lifts.

Extremely durable solid sand cast 88-6-3-2 bronze stake.

Drawing not to scale

Plan Symbol:

Notes

- Requires S8 Wedge Base Lamp (incl. – 25 w)
- Max. lamp rating 35 watts
- Typical spacing 10' to 15'
- Refer to product installation sheet prior to installation

MOUNTING OPTIONS

- Mounting Canopy (CFM1CB)
- Standard Mounting Stake (CMS1CB)
- Long Mounting Stake (CLMS1CB)(incl.)
- Heavy Duty Mounting Stake (CHMS1CB)
- Replacement Stem (XCBPSTEM_____)
- Telescopic Stem (CWTR_____)