

## CAST MR-11 Bullet (CBL5CB) Product Information

### The CAST MR-11 Bullet – Rugged and Compact, Ideal for Niche Applications



#### Description:

This rugged copper and solid bronze MR-11 fixture can be stake or bracket mounted.

#### Features:

- ▶ Heavy-gauge copper shroud with solid brass locking ring
- ▶ Solid bronze knuckle and stake
- ▶ Knuckle adjusts to any angle
- ▶ Convex lens to prevent mineral build-up
- ▶ Pre-wired with 25' tin-coated No-Ox® marine grade wire
- ▶ High-temp socket with solid nickel contacts
- ▶ Includes Fixture Record Tag
- ▶ Spider Splice® ready

#### Uses:

Suitable for both uplighting and downlighting plant material, structures and architectural features. A wide range of lamp wattages and beam angles; as well as optional lenses and louvers provide maximum lighting design flexibility.

#### For more info on design approaches:

[www.cast-lighting.com/articles.html](http://www.cast-lighting.com/articles.html)

#### Construction:

Heavy-gauge copper shroud; solid bronze knuckle and stake; borosilicate convex lens; ceramic socket with solid nickel contacts and stainless steel spring; solid brass retaining ring; 25' tin-coated #16-2 No-Ox® marine-grade wire; Optional solid bronze mounting bracket (XCBPTLTA)

#### For more info on bronze:

[www.cast-lighting.com/art-bronze.html](http://www.cast-lighting.com/art-bronze.html)

#### Warranty:

Lifetime warranty on all components.

#### Dimensions:

8" x 1.5" fully extended


Stake: 6.25"

#### Specifications:

Lamp: 12v MR-11 (35w max.) Not included.

#### Listing:

U.L 1838 Listed Low Voltage Luminaire for wet locations

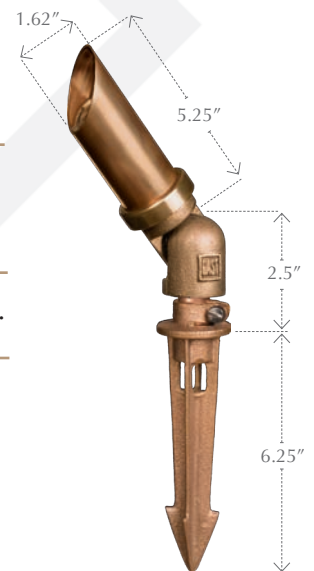

CBL5CB